



ANOMETAL


**Model drawings**  
Beam and post distance

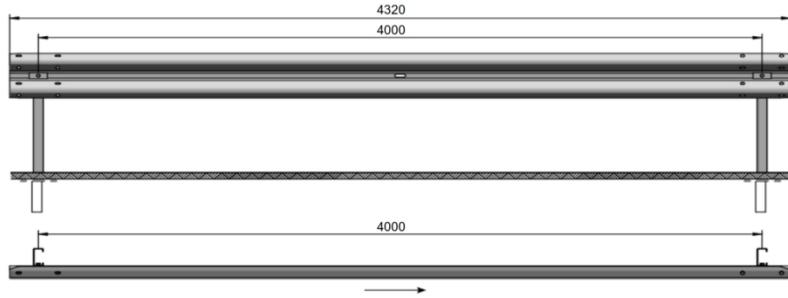

**Dimensions**

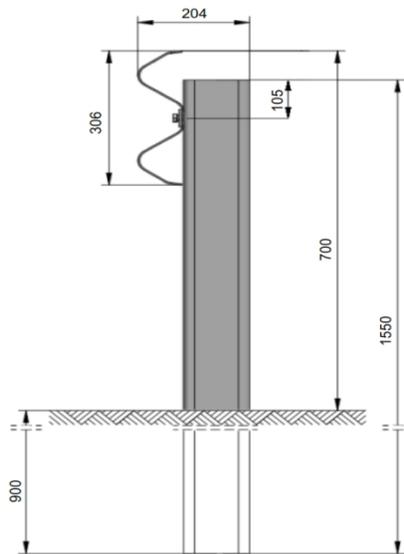

**Assembling**

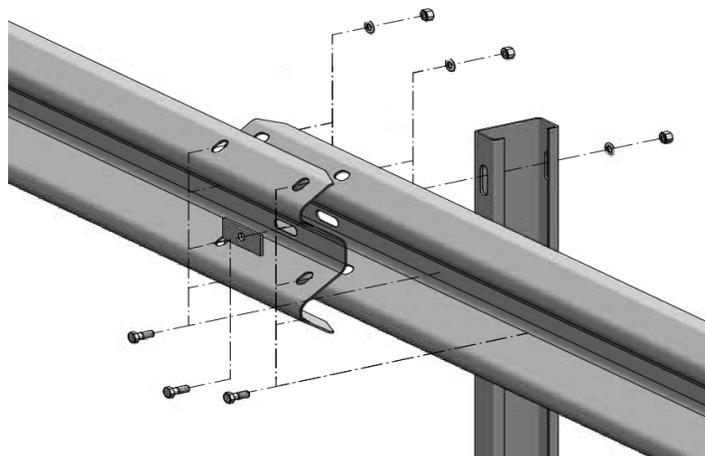

**Description** Single-sided road guardrail of SimpleRail series with containment level N2, working width W4 and acceleration severity index (ASI) A.

**Content:**

- 2-waves steel beam of length 4320mm.
- C-posts 120x60x30 with distance 4000mm.
- Bolts, nuts and washers according to DIN 607, DIN 933, EN ISO 4017.

Manufacturing according to EN1317.

**Surface protection** Hot-dip galvanized according to International Standard EN ISO 1461.

**Certifications**



CE Certificate of Notified European Body.

**Tables**

Performance class	
Containment level	N2
Working width	W4 (1.30m)
Acceleration severity index-ASI	A

Technical features	
Height above ground level	700mm
Overall width	204mm
Post distance	4000mm
Tested min length	80m