



ANOMETAL

Model drawings
Beam and post distance

Dimensions

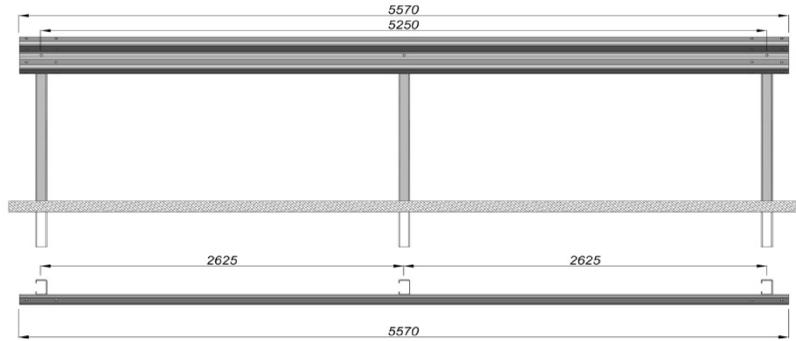

Assembling

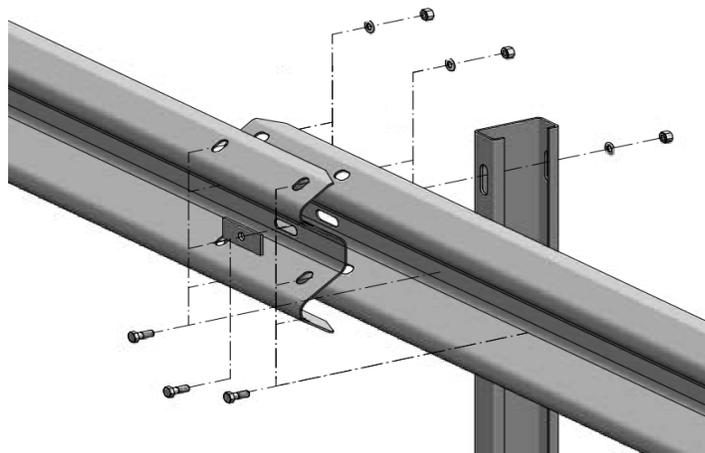

Description Single-sided road guardrail of SimpleRail series with containment level H1, working width W3 and acceleration severity index (ASI) A.

Content:

- 2-waves steel beam of length 5570mm.
- C-posts 100x60x25 with distance 2625mm.
- Bolts, nuts and washers according to DIN 607, DIN 933, EN ISO 4017.

Manufacturing according to EN1317.

Surface protection Hot-dip galvanized according to International Standard EN ISO 1461.

Certifications



CE Certificate of Notified European Body.

Tables

Performance class	
Containment level	H1
Working width	W3 (1.0m)
Acceleration severity index-ASI	A

Technical features	
Height above ground level	700mm
Overall width	180mm
Post distance	2625mm
Tested min length	80m