



ANOMETAL

Model drawings


Beam and post distance

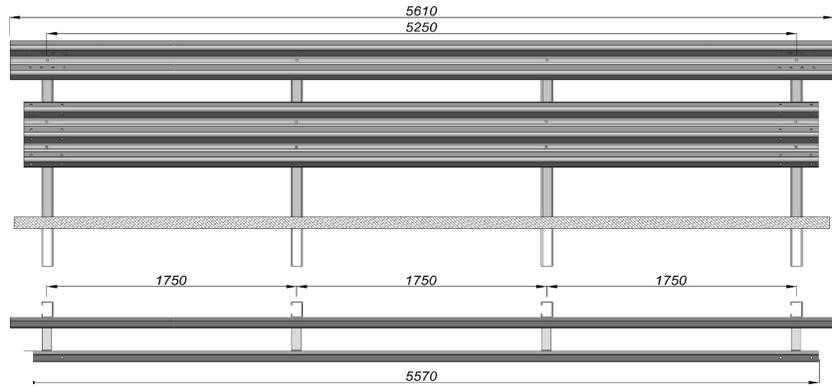

Dimensions

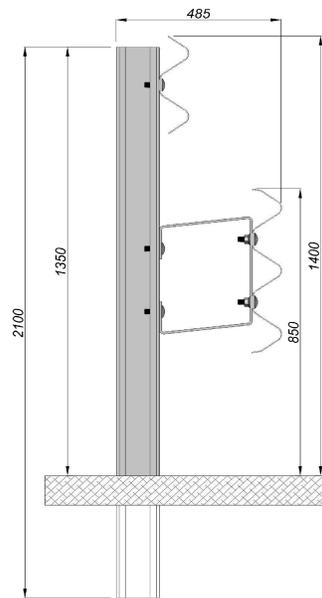

Assembling

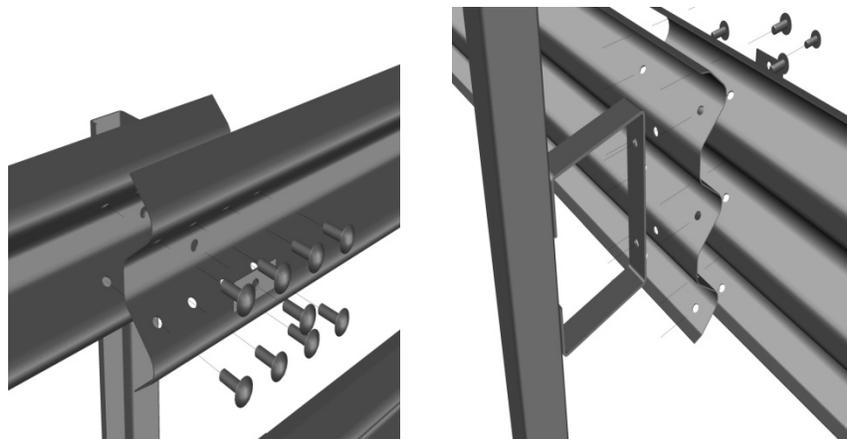

Description Single-sided road guardrail with containment level H3, working width W5 and acceleration severity index (ASI) A.

Content:

- 3-waves steel beam of length 5570mm.
- C-posts 140x80x30 with distance 1750mm.
- Upper beam of length 5610mm.
- Spacer
- Bolts, nuts and washers according to DIN 607, DIN 933, EN ISO 4017.

Manufacturing according to EN1317.

Surface protection

Hot-dip galvanized according to International Standard EN ISO 1461.

Certifications



CE Certificate of Notified European Body.

Tables

Performance class	
Containment level	H3
Working width	W5 (1.7m)
Acceleration severity index-ASI	A

Technical features	
Height above ground level	1400mm
Overall width	485mm
Post distance	1750mm
Tested min length	81m